

Wind Mitigation Report

LOCATED AT: 106-01 - 106-09 Southard st Key West, Florida 33040

PREPARED EXCLUSIVELY FOR: Shipyard Condominium Building # 6

INSPECTED ON: Friday, August 29, 2025



Inspector, Chris Occhiuto HI12393 All Islands Inspections



Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 8/29/25						
Owner Information						
Owner Name: Shipyard Condominium Building # 6 Contact Person: Renee Tompkins						
Address: 106-01 - 106-09 Southard s			Home Phone: (305) 304-5626			
City: Key West	Zip: 33040		Work Phone:			
County: Monroe Cell Phone: 305 304-562				-5626		
Insurance Company: TBD			Policy #: TBD			
Year of Home: 1991	# of Stories: 2		Email: renee@cac	kw.com		
NOTE: Any documentation used in valida accompany this form. At least one photog though 7. The insurer may ask additional	raph must accompan	y this form to validat	e each attribute marked	in questions 3		
Building Code: Was the structure built in the HVHZ (Miami-Dade or Broward country).	inties), South Florida E	Building Code (SFBC-9	94)?			
A. Built in compliance with the FBC a date after 3/1/2002: Building Permi	it Application Date (MA	M/DD/YYYY)//				
☐ B. For the HVHZ Only: Built in comprovide a permit application with a d	late after 9/1/1994: Bu	ilding Permit Applicati				
C. Unknown or does not meet the rec	quirements of Answer	"A" or "B"				
2. Roof Covering: Select all roof covering OR Year of Original Installation/Replace covering identified.						
	Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance		
1. Asphalt/Fiberglass Shingle	_/					
2. Concrete/Clay Tile	_/					
	7/2025					
□ . n	_/					
<u>_</u>	_/					
	_/					
☐ B. All roof coverings have a Miami-lroofing permit application after 9/1/1						
☐ C. One or more roof coverings do no	•		3".			
☐ D. No roof coverings meet the requir	ements of Answer "A	" or "B".				
3. Roof Deck Attachment : What is the wea	akest form of roof dec	k attachment?				
A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c. by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalen mean uplift less than that required for Options B or C below.						
24"inches o.c.) by 8d common nails other deck fastening system or truss/	B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.					
C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Grooved decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalen Inspectors Initials CO Property Address 106-01 - 106-09 Southard st Key West, Florida 33040						

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 2 of 44

		or greater res	istance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least	
	П	-	ed Concrete Roof Deck.	
	П			
	П		or unidentified.	
		G. No attic a		
4				
4. Roof to Wall Attachment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks 5 feet of the inside or outside corner of the roof in determination of WEAKEST type)				
		A. Toe Nails		
			Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or	
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D	
	Miı	nimal conditio	ons to qualify for categories B, C, or D. All visible metal connectors are:	
		X	Secured to truss/rafter with a minimum of three (3) nails, and	
		X	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.	
		B. Clips		
			Metal connectors that do not wrap over the top of the truss/rafter, or	
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.	
		C. Single W	raps	
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.	
☑ D. Double Wraps				
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or	
		X	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.	
		E. Structural	Anchor bolts structurally connected or reinforced concrete roof.	
		F. Other:		
		G. Unknown	or unidentified	
		H. No attic a	ccess	
5.			What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).	
		A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: feet; Total roof system perimeter: feet	
		B. Flat Roof		
	X	C. Other Roo		
6.	Sec	ondary Wate	r Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)	
٠.	X	A. SWR (also sheathing	o called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the	
	П	B. No SWR.	from water intrusion in the event of roof covering loss.	
			or undetermined.	
In			CO Property Address 106-01 - 106-09 Southard st Key West, Florida 33040	
	-	_	<u> </u>	

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Glazed Openings				Non-Glazed Openings	
		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		x	x	X	x	x
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)	X					
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection						

- A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115

	X A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist			
	A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above			
	☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above			
	B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):			
	• ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.)			
	• SSTD 12 (Large Missile – 4 lb. to 8 lb.)			
	• For Skylights Only: ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile - 2 to 4.5 lb.)			
	B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist			
	☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X			

C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
 □ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
 □ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
 □ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials CO Property Address 106-01 - 106-09 Southard st Key West, Florida 33040

B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

in the table above

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter sprotective coverings not meeting the requirements of An with no documentation of compliance (Level N in the ta	nswer "A", "B", or C" or sys				
☐ N.1 All Non-Glazed openings classified as Level A, B, C, o					
☐ N.2 One or More Non-Glazed openings classified as Level table above	D in the table above, and no No	n-Glazed	openings classified as Level X in the		
☐ N.3 One or More Non-Glazed openings is classified as Leve	el X in the table above				
☐ X. None or Some Glazed Openings One or more Glaze	ed openings classified and Le	evel X in	the table above.		
MITIGATION INSPECTIONS MUST E Section 627.711(2), Florida Statutes, provi	ides a listing of individuals v	vho may			
Qualified Inspector Name: Chris Occhiuto	License Type: Home Inspec	tor	License or Certificate #: HI12393		
Inspection Company: All Islands Inspections		Phone: 30	5 240 5641		
Qualified Inspector – I hold an active license as a	: (check one)				
Home inspector licensed under Section 468.8314, Florida Statutes who has completed the statutory number of hours of hurricane mitigation training approved by the Construction Industry Licensing Board and completion of a proficiency exam. Building code inspector certified under Section 468.607, Florida Statutes. General, building or residential contractor licensed under Section 489.111, Florida Statutes. Professional engineer licensed under Section 471.015, Florida Statutes. Professional architect licensed under Section 481.213, Florida Statutes.					
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statute		ns to prop	erly complete a uniform mitigation		
Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statues, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection. I, Chris Occhiuto am a qualified inspector and I personally performed the inspection or (licensed (print name)) contractors and professional engineers only) I had my employee () perform the inspection (print name of inspector) and I agree to be responsible for his/her work. Qualified Inspector Signature:					
Homeowner to complete: Leartify that the named Qualification	d Inspector or his or her amp	lovos die	d parform an inspection of the		
Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.					
Signature: Date:					
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)					
The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.					
Inspectors Initials CO Property Address 106-01 - 106-09 Southard st Key West, Florida 33040					
*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form					


OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Page 5 of 44

Photos

GENERAL PHOTOS

Built in 1991



⊕Sales

□Permits

					≣ Columns ▼
	Number 	Date Issued ♦	Date Completed ♦	Amount 	Permit Type
>	15-00004464	10/28/2015	10/27/2017	\$4,000	Residential
>	03-0809	3/19/2003	3/10/2005	\$825	

□View Tax Info


View Taxes for this Parcel

⊟Мар



ROOF COVERING

Roof permit

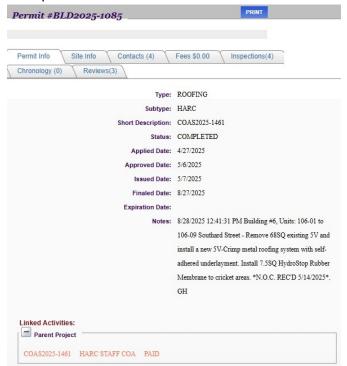

Metal roof photos









ROOF DECK 5/8 plywood nailed with 8D nails every 6 inches






















ROOF TO WALL

Double wraps consisting of a one strap nails with 5+ nails on either side .



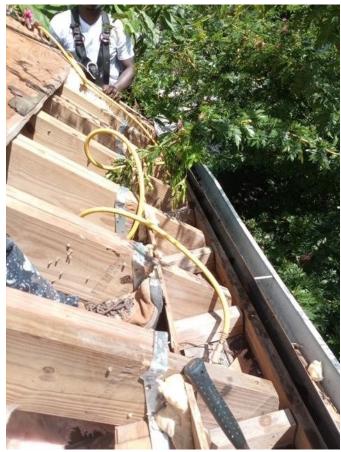



SWR SWR installed










OPENING PROTECTION

All of the doors are hurricane impact rated






TAS 201 202 203

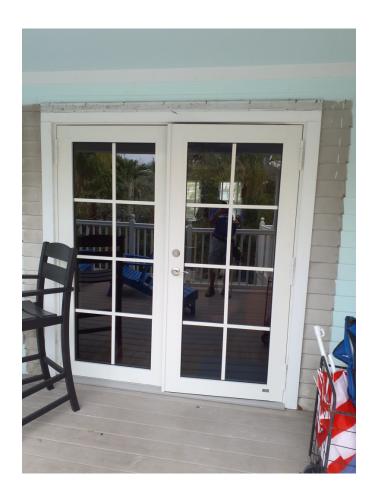



TAS 201 202 203



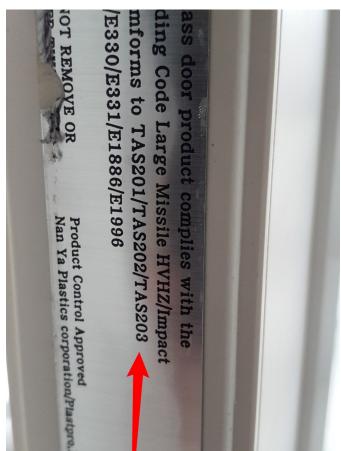


TAS 201 202 203






Miami Dade county approved



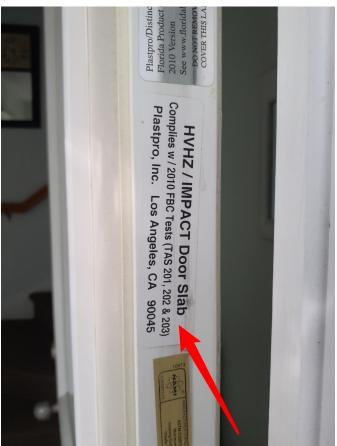

TAS 201 202 203




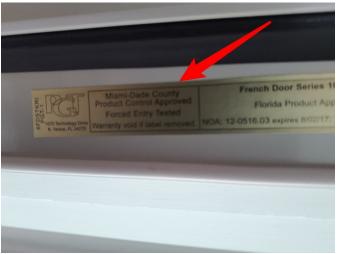


Miami Dade county approved





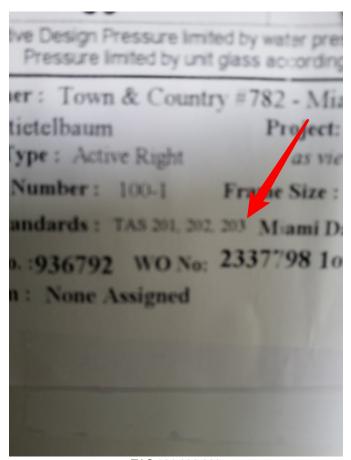

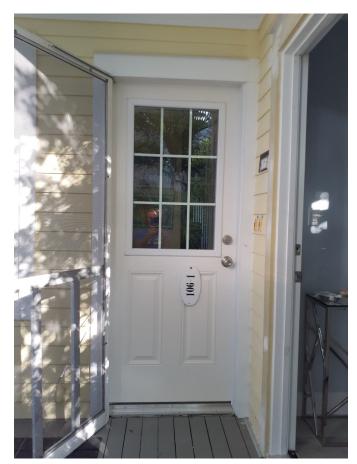


TAS 201 202 203






TAS 201 202 203



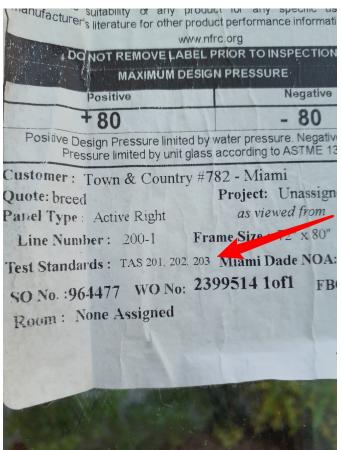

TAS 201 202 203

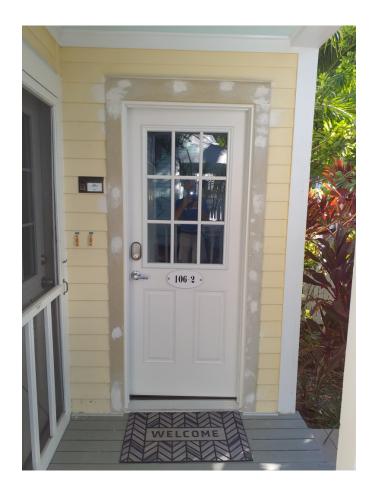





TAS 201 202 203





TAS 201 202 203

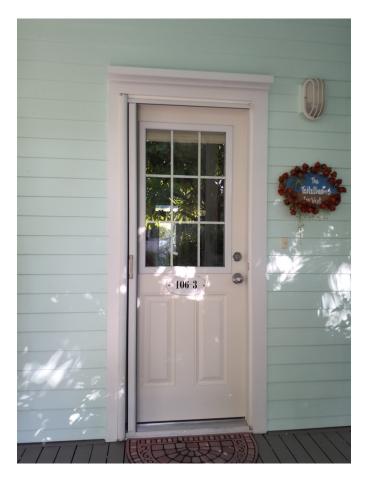

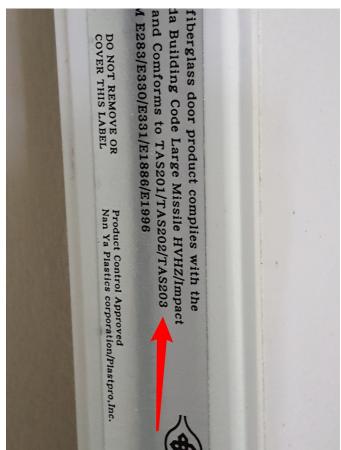


TAS 201 202 203






Miami Dade county approved

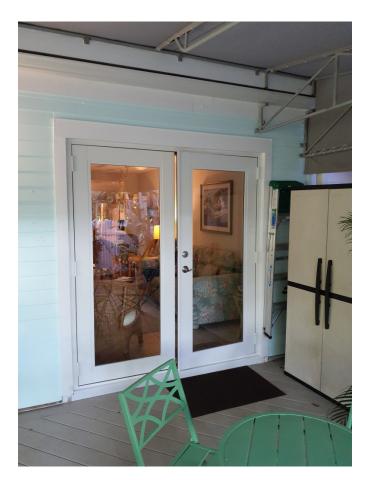



Miami Dade county approved

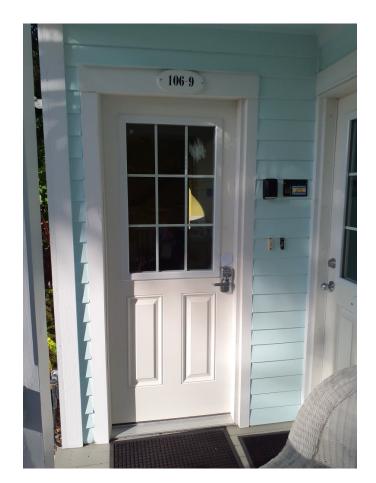




TAS 201 202 203





TAS 201 202 203

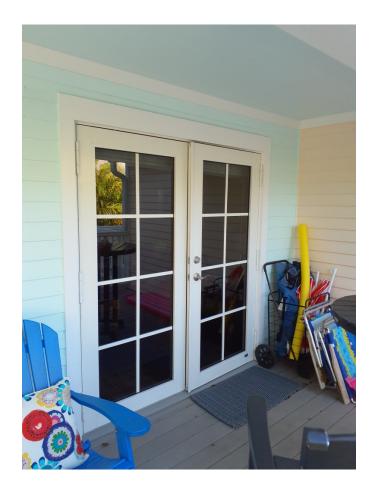




TAS 201 202 203

All of the windows are hurricane impact rated



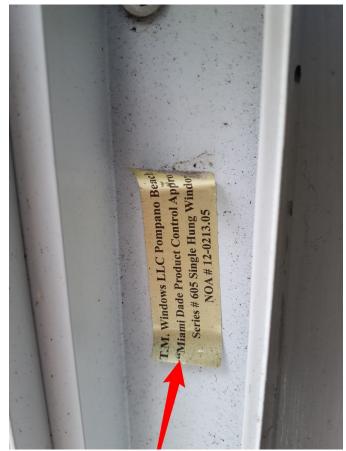

Miami Dade county approved






Miami Dade county approved






Miami Dade county approved



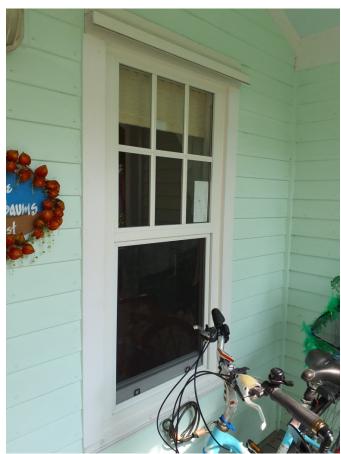

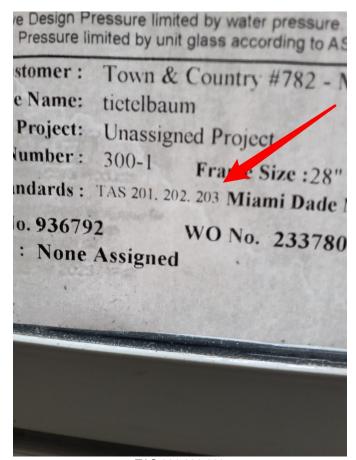




TAS 201 202 203







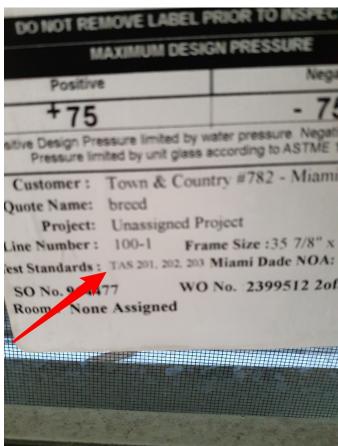

TAS 201 202 203














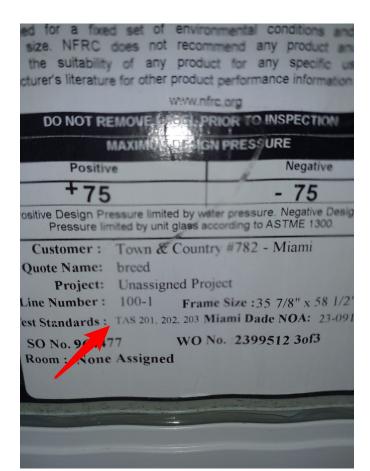







TAS 201 202 203