

Wind Mitigation Report

LOCATED AT: 208-1 -208-10 Southard st Key West, Florida 33040

PREPARED EXCLUSIVELY FOR: Shipyard Condominium Building #1

INSPECTED ON: Tuesday, July 08, 2025



Inspector, Chris Occhiuto HI12393 All Islands Inspections



Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 7/8/25						
Owner Information						
Owner Name: Shipyard Condominium Building #1 Contact Person: Renee Tompkins						
Address: 208-1 -208-10 Southard st Home Phone: (305) 304-5626						
City: Key West	Zip: 33040		Work Phone:			
County: Monroe			Cell Phone: 305 304	1-5626		
Insurance Company: TBD			Policy #: TBD			
Year of Home: 1991	# of Stories: 2		Email: renee@cac	kw.com		
NOTE: Any documentation used in valid						
accompany this form. At least one photog though 7. The insurer may ask additional						
1. Building Code : Was the structure built	-					
the HVHZ (Miami-Dade or Broward cou	ınties), South Florida I	Building Code (SFBC	-94)?			
☐ A. Built in compliance with the FBC a date after 3/1/2002: Building Perm				mit application with		
☐ B. For the HVHZ Only: Built in con						
provide a permit application with a c			tion Date (MM/DD/YYYY)/	/		
C. Unknown or does not meet the re	quirements of Answer	"A" or "B"				
2. Roof Covering: Select all roof covering OR Year of Original Installation/Replace						
covering identified.				No Information		
	Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	Provided for Compliance		
1. Asphalt/Fiberglass Shingle /_	/					
2. Concrete/Clay Tile	/					
☒ 3. Metal 03/1	4/2025					
☐ 4. Built Up						
5. Membrane/_	/					
	A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.					
☐ B. All roof coverings have a Miami-	Dade Product Approva	al listing current at tin	ne of installation OR (for t	he HVHZ only) a		
roofing permit application after 9/1/		•		ater.		
C. One or more roof coverings do no	•		B".			
☐ D. No roof coverings meet the requi	rements of Answer "A	" or "B".				
3. Roof Deck Attachment : What is the we	akest form of roof dec	k attachment?				
A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.						
☐ B. Plywood/OSB roof sheathing wir	th a minimum thicknes	s of 7/16"inch attache				
other deck fastening system or truss	24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.					
▼ C. Plywood/OSB roof sheathing wire	=		=	spaced a maximum of		
24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove						
	decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent					
Inspectors Initials CO Property Address 208-1 -208-10 Southard st Key West, Florida 33040						

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Page 2 of 52

	or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least 182 psf.					
	П	D. Reinforced Concrete Roof Deck.				
	П					
	П		or unidentified.			
		G. No attic a				
4.		eet of the insid	tachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within the or outside corner of the roof in determination of WEAKEST type)			
		A. Toe Nails				
			Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or			
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D			
	Miı	nimal conditio	ons to qualify for categories B, C, or D. All visible metal connectors are:			
		X	Secured to truss/rafter with a minimum of three (3) nails, and			
		X	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.			
		B. Clips				
			Metal connectors that do not wrap over the top of the truss/rafter, or			
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.			
		C. Single W	raps			
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.			
D. Double Wraps						
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or			
		X	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.			
		E. Structural	Anchor bolts structurally connected or reinforced concrete roof.			
		F. Other:				
		G. Unknown	n or unidentified			
		H. No attic a	access			
5.	. Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).					
		A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: feet; Total roof system perimeter: feet			
		B. Flat Roof				
	X	C. Other Ro				
6.	Sec	ondary Wate	er Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)			
A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the						
	П	B. No SWR.	from water intrusion in the event of roof covering loss.			
			or undetermined.			
In	spec		CO Property Address 208-1 -208-10 Southard st Key West, Florida 33040			

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Glazed Openings				Non-Glazed Openings	
		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		x	x	X	x	x
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)	X					
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection						

- A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115

🗵 A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist		
A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above		
☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above		
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):		
• ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.)		
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)		
• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)		
\square B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist		
☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X		

in the table above
☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
<u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials CO Property Address 208-1 -208-10 Southard st Key West, Florida 33040

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter s protective coverings not meeting the requirements of An with no documentation of compliance (Level N in the ta	nswer "A", "B", or C" or syst			
☐ N.1 All Non-Glazed openings classified as Level A, B, C, o	r N in the table above, or no Nor	n-Glazed openings exist		
N.2 One or More Non-Glazed openings classified as Level table above	D in the table above, and no Non	n-Glazed openings classified as Level X in the		
☐ N.3 One or More Non-Glazed openings is classified as Leve	el X in the table above			
☐ X. None or Some Glazed Openings One or more Glaze	ed openings classified and Le	vel X in the table above.		
MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi	ides a listing of individuals w	ho may sign this form.		
Qualified Inspector Name: Chris Occhiuto	License Type: Home Inspec	tor License or Certificate #: HI12393		
Inspection Company: All Islands Inspections		Phone: 305 240 5641		
Qualified Inspector – I hold an active license as a	: (check one)			
Home inspector licensed under Section 468.8314, Florida Statutes who has completed the statutory number of hours of hurricane mitigation training approved by the Construction Industry Licensing Board and completion of a proficiency exam. Building code inspector certified under Section 468.607, Florida Statutes. General, building or residential contractor licensed under Section 489.111, Florida Statutes. Professional engineer licensed under Section 471.015, Florida Statutes.				
Professional architect licensed under Section 481.213, Florida St				
Any other individual or entity recognized by the insurer as posse verification form pursuant to Section 627.711(2), Florida Statute	ssing the necessary qualification	s to properly complete a uniform mitigation		
Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statues, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection. I,				
<u>Homeowner to complete</u> : I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.				
Signature: Date:				
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)				
The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.				
Inspectors Initials CO Property Address 208-1 -208-10 Southard st Key West, Florida 33040				
*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form				

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Page 5 of 52

Photos

GENERAL PHOTOS

Built in 1991

Parcel ID 00013180-000201 Account# Property ID 8779089 8779089

Millage Group Location Address 10KW 208 SOUTHARD St 10, KEY WEST

UNIT 201 SHIPYARD. A CONDOMINIUM OR 1162-613/14 OR 2876-2487 LET/ADM OR 2876-2205 D/C OR 2876-2208/09 OR 2950-2434 **Legal Description**

(Note: Not to be used on legal documents.) 8064

Neighborhood Property Class Subdivision CONDOMINIUM (0400)

Sec/Twp/Rng Affordable 06/68/25

□Owner

Housing

DUBESKY HAROLDD J 949 Sherry Ln Lancaster PA 17601

DUBENSKY TRACY L 949 Sherry Ln Lancaster PA 17601

DUBENSKY TRACY LYNN
MUNDORF TRUST 949 Sherry Ln Lancaster PA 17601

⊕Valuation

Historical Assessments




⊕Sales

□Permits

I≣ Columns ♥

ROOF COVERING


Roof permit

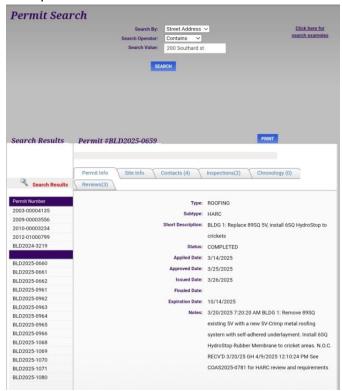

Metal roof photos





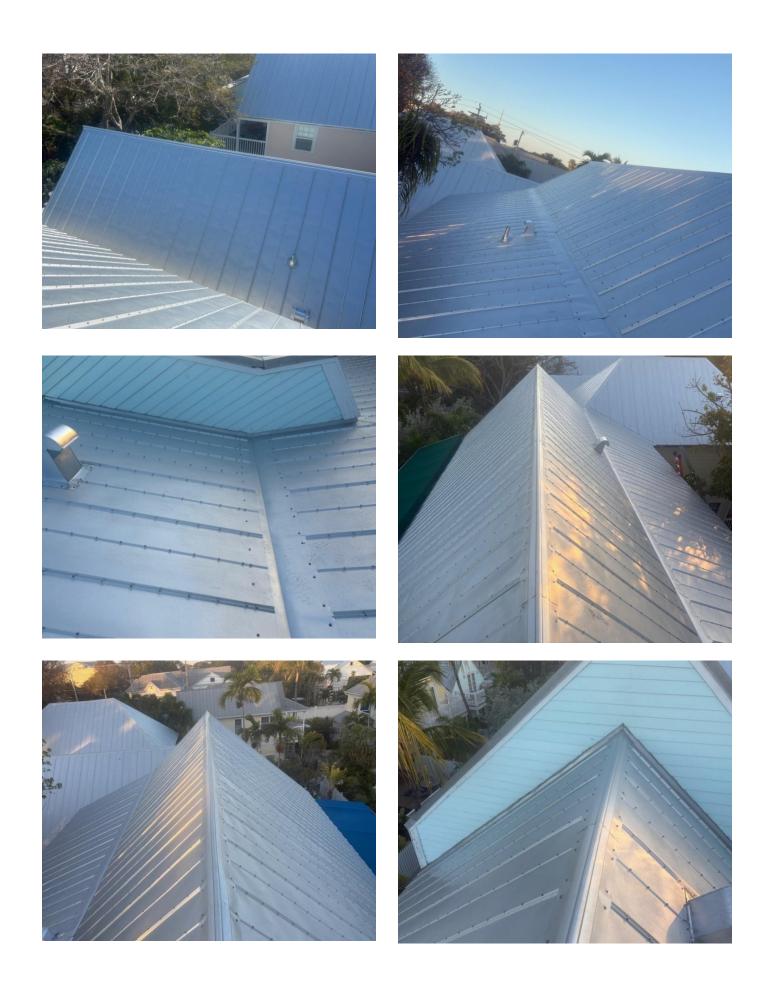

ROOF DECK 5/8 plywood nailed with 8D nails every 6 inches























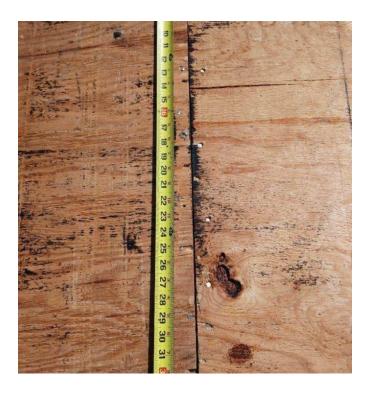





ROOF TO WALLDouble wraps with a single strap nailed to the top plate on both sides .



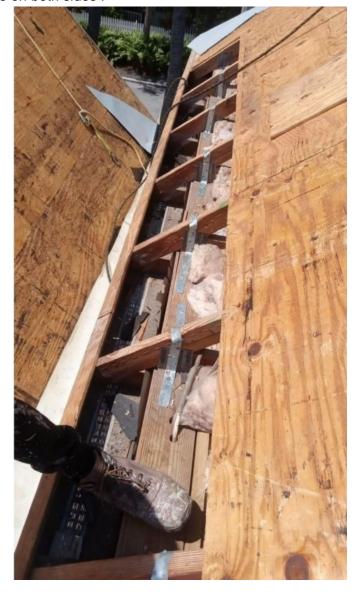

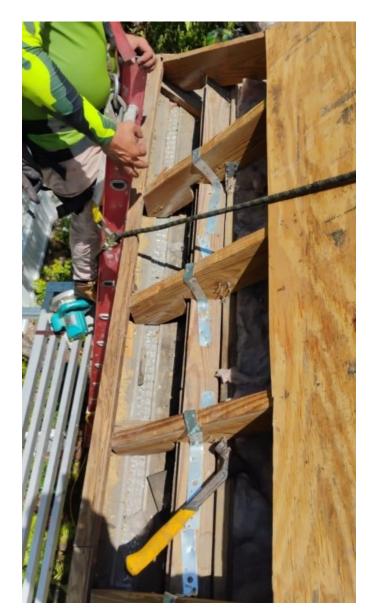



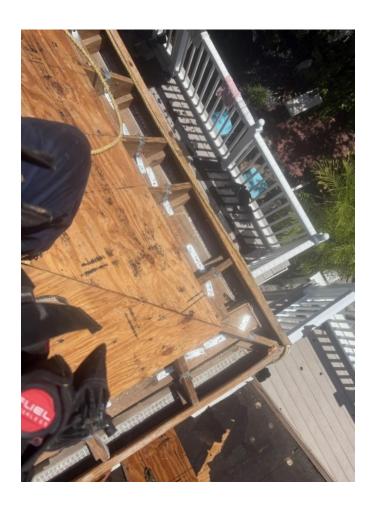

SWR SWR installed














OPENING PROTECTION

All of the doors are hurricane impact rated





TAS 201 202 203

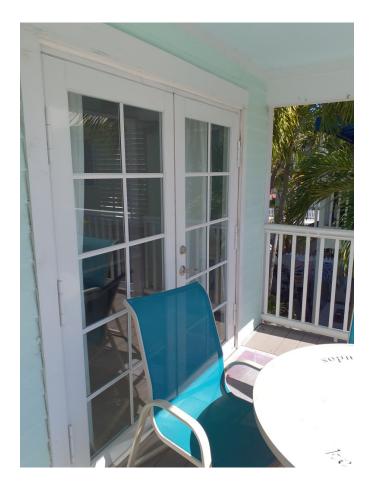








Miami Dade county approved

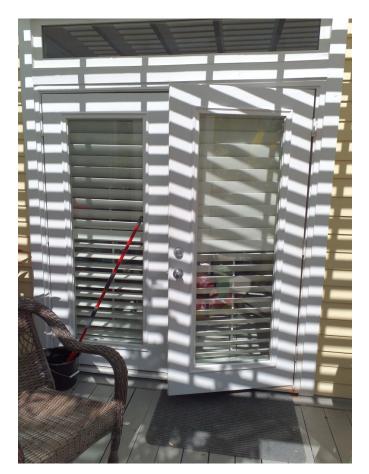




TAS 201 202 203















Miami Dade county approved









Miami Dade county approved





TAS 201 202 203






TAS 201 202 203



Miami-Dade county approved

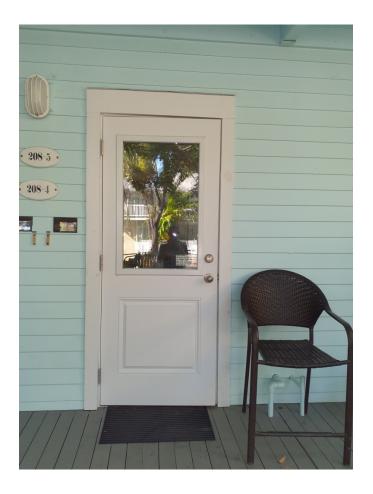





The door is HVHZ rated





Miami-Dade county approved





TAS 201 202 203









Miami-Dade county approved



All of the windows are hurricane impact rated





Miami Dade county approved











Miami-Dade county approved







Miami-Dade county approved









Miami-Dade county approved





Miami-Dade county approved









Miami-Dade county approved









Miami-Dade county approved









Miami-Dade county approved















Miami-Dade county approved